ebacryl The economic solution for prototypes, mouldings and scenery building

Tooling Resins Blocks Auxiliaries Silicones



Economical and environmentally friendly: ebacryl for the fast production of laminates of the highest dimensional accuracy

Whether prototypes, mouldings or scenery building – the **ebalta** special artificial resins in the **ebacryl** range of products can be put to versatile use. All **ebacryl** materials have one thing in common: they are very easy to handle and allow any thickness of laminates to be produced in only one process.

Efficient manufacture

ebacryl is an environmentally friendly system that can be used to quickly and easily produce laminates of a high dimensional accuracy. It can be laminated to any thickness. Pre production tools for hand lay-up and injection laminates as well as for prepregs with a temperature resistance up to 125 °C can be manufactured in just a day. This saves time and makes *ebacryl* a very fast and economical and fast system.

Ecological processing

ebacryl is a water-based material that is almost as hard and durable as artificial resin – but it is non-toxic, environmentally friendly and almost odourless. There is no risk to health and tools can be cleaned with water. Laminates of **ebacryl** are classified in fire class B1 (hardly flammable).

Flexible use

ebacryl systems are suitable for a wide variety of different uses:


- to produce large and dimensionally accurate female moulds, e. g. for design models of clay or foam
- for the fast lamination of backing plates for flexible female skin moulds of silicone or polyurethane, e. g. when moulding sculptures or natural structures
- to reinforce existing moulds or surfaces: expanded polystyrene, for example, can be walked over if laminated with 1 to 2 layers of *ebacryl*
- to produce decorative components and models: e. g. lightweight *ebacryl* mouldings are used in scenery building to produce rock or tree structures



Design model from block material



Expanded polystyrene scenery with *ebacryl* coating

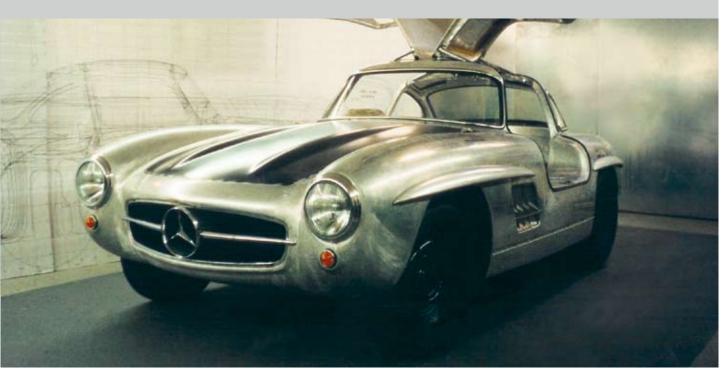

Uncomplicated handling

Laminates can be made with *ebacryl* systems very easily and in only a few steps. First, the *ebacryl* Gelcoat O/SP-1 is applied. This has an almost plastic-like character. Glass fibre mats (300 g), that have been saturated in a mixture (2:1 parts by weight) of *ebacryl* powder L and *ebacryl* emulsion EM, are laid on this.

The laminates can be removed from the mould after 2 to 3 hours. We recommend that they are left to set overnight. We will be pleased to provide more detailed instructions, just give us a call: **+49 9861 7007-0**



Clay design model



ebacryl scenery

Highly detailed surface of **ebacryl**

Tooling Resins Blocks Auxiliaries Silicones

Composites Mould and tool making Design model making Foundry tooling Rapid Prototyping Electrical encapsulation Further applications

We are pleased to help if you have any questions on technology or products. Just call or make an appointment with your regional sales agent. We are looking forward to hearing from you!

ebalta Kunststoff GmbH Erlbacher Straße 100 91541 Rothenburg ob der Tauber Germany Phone: +49 9861 7007-0 Fax: +49 9861 7007-77 info@ebalta.de www.ebalta.de